

Tripod Screen

| Tripod Screen |




axpert

axpert marketing

INTELLIGENT OFFICE EQUIPMENT MACHINE

Tripod Screen

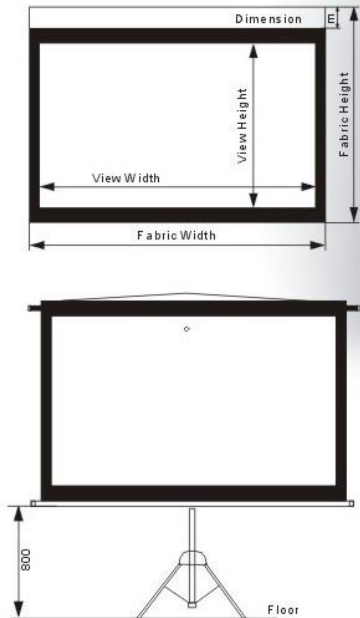

Relevant Dimension of Tripod Projection Screen

Dimensions: mm

Sequence Number	Ratio	Specification (inch)	Image Dimension		Dimension E	Dimension of Fabric Surface		Dimension of Reel Pipe		Poling Dimension		Housing	
			Width W	Height H		Width	Height	Diameter	Length	Diameter	Length	Specification	Length
8	1:1	80"	1450	1450	205	1530	1760	Φ28	1560	Φ19	1600	B2	1600
9		96"	1720	1720	205	1800	2030	Φ28	1830	Φ19	1870	B2	1870
10		112"	2000	2000	205	2080	2310	Φ28	2110	Φ19	2150	B2	2150
11		135"	2400	2400	205	2480	2710	Φ40	2510	Φ22	2550	A4	2558
5	4:3	120"	2400	1800	205	2480	2110	Φ40	2510	Φ22	2550	A4	2558

MODEL	DESCRIPTIONS		REF SEQUENCE NUMBER
AXPERT - TRIPOD SCREEN (white steel casing)			
TS - S - 150	5' (H) X 5' (W)	(1.5m X 1.5m)	8
TS - S - 180	6' (H) X 6' (W)	(1.8m X 1.8m)	9
TS - S - 210	7' (H) X 7' (W)	(2.1m X 2.1m)	10
TS - S - 240	8' (H) X 8' (W)	(2.4m X 2.4m)	11
TS - V - 240	6' (H) X 8' (W)	(1.8m X 2.4m)	5

* Image provided are for illustration purposes only.

* Specifications are subject to change without prior notice.

Tripod Screen

| Tripod Screen |




axpert

axpert marketing

INTELLIGENT OFFICE EQUIPMENT MACHINE

Tripod Screen

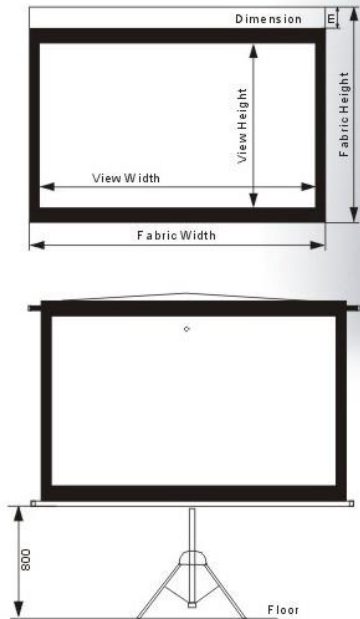

A4 Iron end cover



B2 Plastic end cover

Installation and Operation of Screens

- ◇ Open the packing box and remove all packaging;
- ◇ Place the screen vertically as shown in Figure 1;
- ◇ Press adjust key(5), pull upward drop tube(6) to pull out screen housing from lower extending tube of topside tow bar.
- ◇ At the moment the screen housing can rotate freely.
- ◇ Rotate the screen housing to be close to the horizontal level (openings upward). Hold screen housing by one hand and lift up slightly to leave from the ground, press downward tripod fork(15) and hand down the assembly after pulling off the tripod.
- ◇ Rotate the upper rotary pole(7) to place on the topside tow bar(8) horizontally.
- ◇ Slightly pull screen out of the screen housing then hang the hang strip(14) on the opening of whirling arm.
- ◇ Press adjust key by one hand and pull upward drop tube(6) by the other hand until drop tube is locked.



Figure 1



Figure 2



Figure 3



Figure 4




Figure 5



Figure 6

Tripod Type

| Tripod Type |



* Image provided are for illustration purposes only.

* Specifications are subject to change without prior notice.